

NPDES Permit No. IL0036421

Notice No. JDS:25102501.jds

Public Notice Beginning Date: December 19, 2025

Public Notice Ending Date: January 18, 2025

National Pollutant Discharge Elimination System (NPDES) Permit Program

PUBLIC NOTICE/FACT SHEET

of

Draft Modified NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By: Illinois EPA
Division of Water Pollution Control
Permit Section
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276
217/782-0610

Name and Address of Discharger:
Illinois American Water – Godfrey Wastewater
300 North Water Works Drive
Belleville, Illinois 62223-9040

Name and Address of Facility:
Illinois American Water – Godfrey Wastewater
4725 Brecht Lane
Godfrey, Illinois 62035
(Madison County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES Permit to discharge into the waters of the state and has prepared a draft Permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. All comments on the draft Permit and requests for hearing must be received by the IEPA by U.S. Mail, carrier mail or hand delivered by the Public Notice Ending Date. Interested persons are invited to submit written comments on the draft Permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the Permit applicant. The NPDES Permit and notice numbers must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft Permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft Permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final Permit is issued. For further information, please call Jonathan Smith at 217/782-0610.

The following water quality and effluent standards and limitations were applied to the discharge:

Title 35: Environmental Protection, Subtitle C: Water Pollution, Chapter I: Pollution Control Board and the Clean Water Act were applied in determining the applicable standards, limitations and conditions contained in the draft Permit.

The applicant is engaged in treating domestic wastewater for the City of Godfrey.

The length of the Permit is approximately 5 years.

The main discharge number is 001. The seven day once in ten year low flow (7Q10) of the receiving stream, Mississippi River is 21330 cfs.


The design average flow (DAF) for the facility is 2.2 million gallons per day (MGD) and the design maximum flow (DMF) for the facility is 5.5 MGD. Treatment consists of grit removal, activated sludge and chlorination. Sludge is aerobically digested, dewatered on a belt press and applied to farmland.

This Reissued Permit does not increase the facility's DAF, DMF, concentration limits, and/or load limits.

Application is made for the existing discharge(s) which is (are) located in Madison County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

<u>Discharge Number</u>	<u>Receiving Stream</u>	<u>Latitude</u>	<u>Longitude</u>	<u>Stream Classification</u>	<u>Integrity Rating</u>
001	Mississippi River	38° 55' 30" North	90° 14' 52" West	General Use	Not Rated

To assist you further in identifying the location of the discharge(s) please see the attached map.

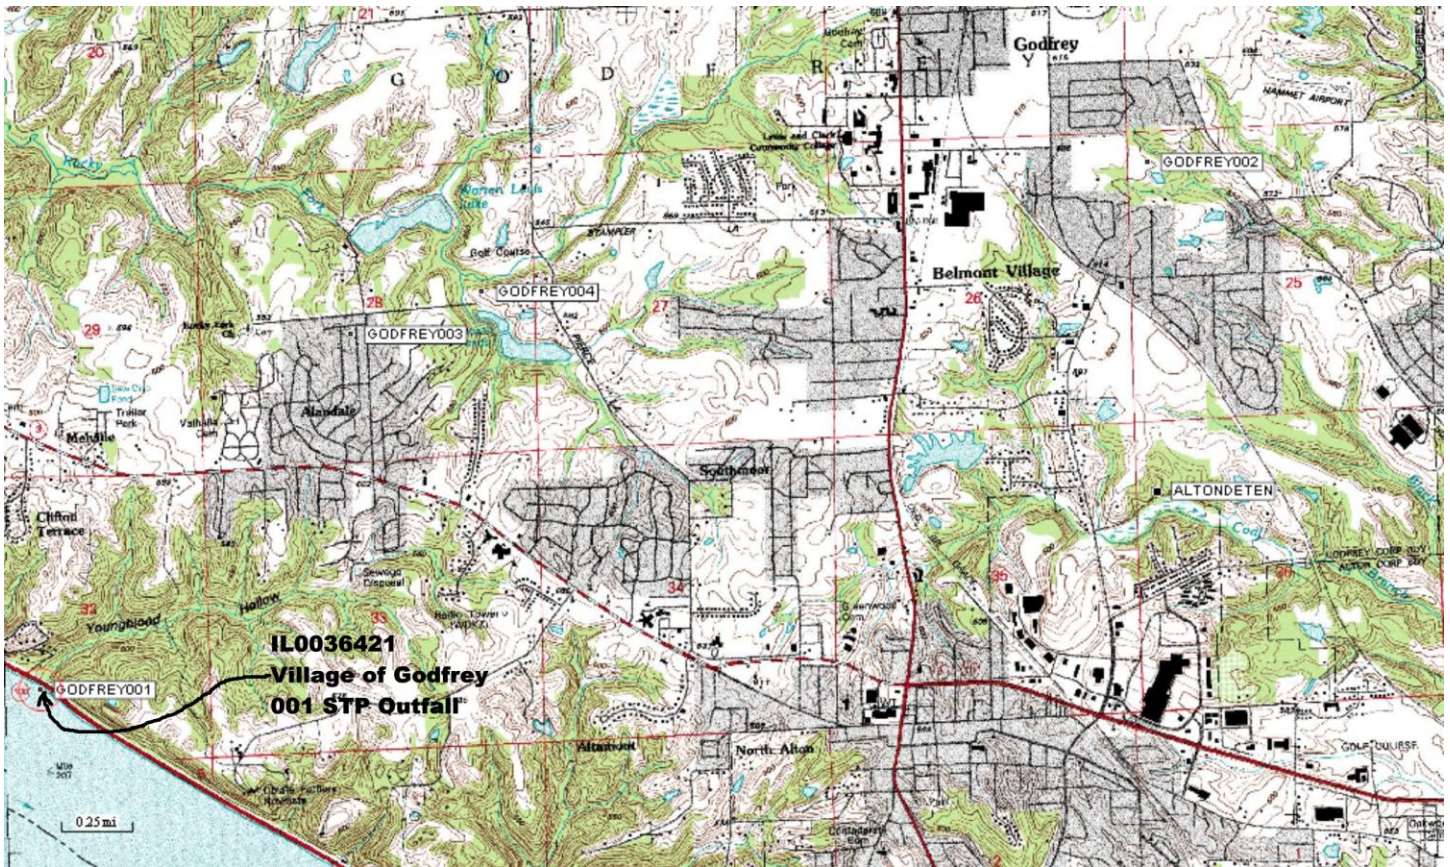

The stream segment(s), segment J-05, receiving the discharge from outfall(s) 001 is on the draft 2024 Illinois Integrated Water Quality Report and Section 303(d) List of impaired waters.

The Godfrey STP discharges to the Mississippi River (IL_J-05). The Mississippi River, Waterbody Segment, IL J-05, is listed on the 2024 Illinois Integrated Water Quality Report and Section 303(d) List as impaired for fish consumption with potential causes given as aldrin, dieldrin, endrin, heptachlor, mercury, mirex, polychlorinated biphenyls (PCBs), and toxaphene and public and food processing water supply use with a potential cause given as iron. Aesthetic quality, aquatic life, and primary contact uses *are* fully supported. From the treatment plant to *the* end of segment IL_J-05 is a distance of 12.0 stream miles.

Segment IL_J-02 is the next segment of the Mississippi River. The Mississippi River, Waterbody Segment IL_J-02, is listed on the 2024 Illinois Integrated Water Quality Report and Section 303(d) List as impaired for fish consumption with potential caused given as aldrin, dieldrin, endrin, heptachlor, mercury, mirex, polychlorinated biphenyls (PCBs), and toxaphene. Aquatic life, primary contact, and public and food processing water supply uses are fully supported. Segment IL_J-02 is 13.83 stream miles in length.

Segment IL_J is the next segment of the Mississippi River. The Mississippi River, Waterbody Segment IL J, is listed on the 2024 Illinois Integrated *Water* Quality Report and Section 303(d) List as impaired for fish consumption with potential caused given as mercury and polychlorinated biphenyls (PCBs). Aquatic life and public and food processing water supply uses are fully supported. Segment IL_J is 6.4 stream miles in length.

Segment IL_J-36 is the next segment of the Mississippi River. The Mississippi River, Waterbody Segment IL J-36, is listed on the 2024 Illinois Integrated Water Quality Report and Section 303(d) List as impaired for fish consumption with potential caused given as aldrin, dieldrin, endrin, heptachlor, mercury, mirex, polychlorinated biphenyls (PCBs), and toxaphene, and primary contact use with a potential cause given as fecal coliform. Aesthetic quality and aquatic life use is fully supported. Segment IL_J-36 is 58.71 stream miles in length.

Segment IL 1-84 is the next segment of the Mississippi River. The Mississippi River, Waterbody Segment IL_1-84, is listed on the 2024 Illinois Integrated Water Quality Report and Section 303(d) List as impaired for fish consumption with potential caused given as aldrin, dieldrin, endrin, heptachlor, mercury, mirex, polychlorinated biphenyls (PCBs), and toxaphene, and public and food processing water supply use with a potential cause given as iron. Aesthetic quality, aquatic life, and primary contact uses are fully supported. Segment IL_I-84 is 119.5 stream miles in length.

The Godfrey STP effluent travels a total of 214.91 miles before it combines with the Ohio River and leaves Illinois. There is no algae impairment noted in the 303(d) List nor is there any impairment due to a cause of dissolved oxygen, which is indicative of an algae impairment, anywhere in this downstream continuum. There is no evidence to imply that phosphorus from the Godfrey facility is causing any impairment prohibited by the narrative water quality standard.

The downstream median sestonic chlorophyll a concentration is 18.8 ug/L; the daily maximum pH is less than 9.0; and there are not two or more days where the daily maximum pH has been greater than 8.5 and the daily maximum dissolved oxygen saturation is greater than 110%, based on previous Agency water quality stream monitoring.

The discharge(s) from the facility is (are) proposed to be monitored and limited at all times as follows:

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 2.2 MGD (design maximum flow (DMF) of 5.5 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:

Parameter	LOAD LIMITS lbs/day			CONCENTRATION LIMITS mg/L			Regulation
	Monthly Average	Weekly Average	Daily Maximum	Monthly Average	Weekly Average	Daily Maximum	
CBOD ₅ **	367 (917)	734 (1835)		20	40		35 IAC 304.120 40 CFR 133.102
Suspended Solids**	459 (1147)	826 (2064)		25	45		35 IAC 304.120 40 CFR 133.102
pH	Shall be in the range of 6 to 9 Standard Units						35 IAC 304.125
Fecal Coliform	Daily Maximum shall not exceed 400 per 100 mL (May through October)						35 IAC 304.121
Chlorine Residual							0.75 35 IAC 302.208
PFAS***							Monitor Only 35 IAC 309.146
PFAS Sum***							Monitor only 35 IAC 309.146
Total Phosphorus (as P)							Monitor only 35 IAC 309.146
Total Nitrogen (as N)							Monitor only 35 IAC 309.146
Ammonia Nitrogen (as N)							Monitor only 35 IAC 309.146

*Load Limits are calculated by using the formula: $8.34 \times (\text{Design Average and/or Maximum Flow in MGD}) \times (\text{Applicable Concentration in mg/L})$.

** BOD₅ and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent.

*** To address Per- and polyfluoroalkyl substances (PFAS) under the NPDES permit program the Illinois Environmental Protection Agency (IEPA), Bureau of Water, Permit Section has implemented a PFAS Reduction Initiative. Under this initiative, it has been determined that those Publicly Owned Treatment Works who are classified as a major discharger by USEPA, and with the type and variety of industries that discharge to the sewer system, have the potential to receive wastewater contaminated by PFAS. To help eliminate and/or control the amount of PFAS being discharged to the sewer system, the permittee will be required to monitor for PFAS compounds and to require Best Management Practices (BMPs) be developed by specific industrial facilities.

Monitoring will be done on the wastewater treatment plant's influent, effluent and biosolids. The permit will also require BMPs be developed for those industrial facilities who have been identified by USEPA as having the potential to use and/or discharge PFAS compounds. Monitoring for PFAS has been added to the effluent limitations, monitoring, and reporting page(s) for outfalls (Outfall 001), and Special Conditions 20 and 21 have been added to the permit as well.

This draft Permit also contains the following requirements as special conditions:

1. Reopening of this Permit to include different final effluent limitations.
2. Operation of the facility by or under the supervision of a certified operator.
3. Submission of the operational data in a specified form and at a required frequency at any time during the effective term of this Permit.
4. More frequent monitoring requirement without Public Notice in the event of operational, maintenance or other problems resulting in possible effluent deterioration.
5. Prohibition against causing or contributing to violations of water quality standards.
6. Discharge Monitoring Reporting (DMR).
7. The provisions of 40 CFR Section 122.41 (n) are applicable and are hereby incorporated by reference.
8. Effluent sampling point location.
9. Seasonal fecal coliform limits.
10. Monitoring for arsenic, barium, cadmium, hexavalent chromium, total chromium, copper, weak acid dissociable cyanide, total cyanide, fluoride, dissolved iron, total iron, lead, manganese, mercury, nickel, oil, phenols, selenium, silver and zinc is required to be conducted semi-annually beginning 3 months from the effective date.
11. Burden reduction.
12. A requirement for biomonitoring of the effluent.
13. Conditional authorization to discharge from high level emergency bypass(es) based on 40 CFR.
14. Submission of semi annual reports indicating the quantities of sludge generated and disposed.
15. A zone of initial dilution (ZID) for ammonia, cyanide (WAD), and copper.
16. CMOM plan.
17. Phosphorus Discharge Optimization Plan.
18. Requirement to meet 0.5 mg/L Total Phosphorus by 2035 subject to feasibility and exceptions.
19. Reopening of this Permit to include revised effluent limitations based on a Total Maximum Daily Load (TMDL) or other water quality study.
20. PFAS Testing and Reporting.
21. PFAS Reduction Program.

NPDES Permit No. IL0036421

Illinois Environmental Protection Agency

Division of Water Pollution Control

2520 West Iles Avenue

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Modified (NPDES) Permit

Expiration Date: October 31, 2024

Issue Date:
Effective Date:

Name and Address of Permittee:

Illinois American Water – Godfrey Wastewater
300 North Water Works Drive
Belleville, Illinois 62223-9040

Facility Name and Address:

Illinois American Water – Godfrey Wastewater
4725 Brecht Lane
Godfrey, Illinois 62035
(Madison County)

Receiving Waters: Mississippi River

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of the Ill. Adm. Code, Subtitle C, Chapter I, and the Clean Water Act (CWA), the above-named Permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the Effluent Limitations, Monitoring, and Reporting requirements; Special Conditions and Attachment H Standard Conditions attached herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the Permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Darin E. LeCrone, P.E.
Manager, Permit Section
Division of Water Pollution Control

DEL: JDS:25102501.jds

NPDES Permit No. IL0036421

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 2.2 MGD (design maximum flow (DMF) of 5.5 MGD).

From the modification date of this Permit until the expiration date, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

<u>Parameter</u>	<u>LOAD LIMITS lbs/day</u>			<u>CONCENTRATION</u>			<u>Sample Frequency</u>	<u>Sample Type</u>
	<u>Monthly Average</u>	<u>Weekly Average</u>	<u>Daily Maximum</u>	<u>Monthly Average</u>	<u>Weekly Average</u>	<u>Daily Maximum</u>		
Flow (MGD)							Continuous	
CBOD ₅ ** ⁽¹⁾	367 (917)	734 (1835)		20	40		2 Days/Week	Composite
Suspended Solids ⁽¹⁾	459 (1147)	826 (2064)		25	45		2 Days/Week	Composite
pH	Shall be in the range of 6 to 9 Standard Units						2 Days/Week	Grab
Fecal Coliform***	Daily Maximum shall not exceed 400 per 100 mL (May through October)						2 Days/Week	Grab
Chlorine Residual***						0.75	2 Days/Week	Grab
PFAS****			****			****	****	****
PFAS Sum****			****			****	****	****
Total Phosphorus (as P)							Monitor only 1 Day/Month	Composite
Total Nitrogen (as N)							Monitor only 1 Day/Month	Composite
Ammonia Nitrogen (as N)							Monitor only 1 Day/Month	Composite

*Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

**Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

***See Special Condition 9.

***See Special Condition 20.

(continued the next Page)

NPDES Permit No. IL0036421

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall. (continued from last Page)

⁽¹⁾BOD₅ and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent. The percent removal need not be reported to the IEPA on DMRs but influent and effluent data must be available, as required elsewhere in this Permit, for IEPA inspection and review. For measuring compliance with this requirement, 5 mg/L shall be added to the effluent CBOD₅ concentration to determine the effluent BOD₅ concentration. Percent removal is a percentage expression of the removal efficiency across a treatment plant for a given pollutant parameter, as determined from the 30-day average values of the raw wastewater influent concentrations to the facility and the 30-day average values of the effluent pollutant concentrations for a given time period.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

Fecal Coliform shall be reported on the DMR as a daily maximum value.

pH shall be reported on the DMR as minimum and maximum value.

Chlorine Residual shall be reported on the DMR as daily maximum value.

Total Phosphorus shall be reported on the DMR as a daily maximum value.

Total Nitrogen shall be reported on the DMR as a daily maximum value. Total Nitrogen is the sum total of Total Kieldahl Nitrogen, Nitrate, and Nitrite.

NPDES Permit No. IL0036421

Influent Monitoring, and Reporting

The influent to the plant shall be monitored as follows:

<u>Parameter</u>	<u>Sample Frequency</u>	<u>Sample Type</u>
Flow (MGD)	Continuous	
BOD ₅	2 Days/Week	Composite
Suspended Solids	2 Days/Week	Composite
PFAS*	*	*
PFAS Sum*	*	*

Influent samples shall be taken at a point representative of the influent.

Flow (MGD) shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

BOD₅ and Suspended Solids shall be reported on the DMR as a monthly average concentration.

* See Special Condition 20.

Biosolids Monitoring, and Reporting

Biosolids shall be monitored as follows:

<u>Parameter</u>	<u>Sample Frequency</u>	<u>Sample Type</u>
PFAS*	*	*
PFAS Sum*	*	*

*See Special Condition 20.

Special Conditions

SPECIAL CONDITION 1. This Permit may be modified to include different final effluent limitations or requirements which are consistent with applicable laws and regulations. The IEPA will public notice the permit modification.

SPECIAL CONDITION 2. The use or operation of this facility shall be by or under the supervision of a Certified Class 1 operator.

SPECIAL CONDITION 3. The IEPA may request in writing submittal of operational information in a specified form and at a required frequency at any time during the effective period of this Permit.

SPECIAL CONDITION 4. The IEPA may request more frequent monitoring by permit modification pursuant to 40 CFR Section 122.63 and Without Public Notice.

SPECIAL CONDITION 5. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 Ill. Adm. Code 302.

SPECIAL CONDITION 6. The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) electronic forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee is required to submit electronic DMRs (NetDMRs) instead of mailing paper DMRs to the IEPA unless a waiver has been granted by the Agency. More information, including registration information for the NetDMR program, can be obtained on the IEPA website, <https://epa.illinois.gov/topics/water-quality/surface-water/netdmr.html>.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 25th day of the following month, unless otherwise specified by the permitting authority.

Permittees that have been granted a waiver shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Attention: Compliance Assurance Section, Mail Code # 19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276

SPECIAL CONDITION 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.

SPECIAL CONDITION 8. Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

SPECIAL CONDITION 9. Fecal Coliform limits for Discharge Number 001 are effective May thru October. Sampling of Fecal Coliform is only required during this time period.

The total residual chlorine limit is applicable at all times. If the Permittee is chlorinating

Special Conditions

for any purpose during the months of November through April, sampling is required on a daily grab basis. Sampling frequency for the months of May through October shall be as indicated on effluent limitations, monitoring and reporting page of this Permit.

SPECIAL CONDITION 10. The Permittee shall conduct semi-annual monitoring of the effluent upon operational attainment of the proposed facility and report concentrations (in mg/l) of the following listed parameters. Monitoring shall begin three (3) months from the operational attainment of the proposed facility. The sample shall be a 24-hour effluent composite except as otherwise specifically provided below and the results shall be submitted on Discharge Monitoring Report electronic forms to IEPA unless otherwise specified by the IEPA. The parameters to be sampled and the minimum reporting limits to be attained are as follows:

<u>STORET</u> <u>CODE</u>	<u>PARAMETER</u>	<u>Minimum</u> <u>reporting limit</u>
01002	Arsenic	0.05 mg/L
01007	Barium	0.5 mg/L
01027	Cadmium	0.001 mg/L
01032	Chromium (hexavalent) (grab)	0.01 mg/L
01034	Chromium (total)	0.05 mg/L
01042	Copper	0.005 mg/L
00720	Cyanide (total) (grab)***	5.0 µg/L
00722	Cyanide (grab) (available**** or amenable to chlorination)***	5.0
00951	Fluoride	0.1 mg/L
01045	Iron (total)	0.5 mg/L
01046	Iron (Dissolved)	0.5 mg/L
01051	Lead	0.05 mg/L
01055	Manganese	0.5 mg/L
71900	Mercury (grab)**	1.0 ng/L*
01067	Nickel	0.005 mg/L
00556	Oil (hexane soluble or equivalent) (Grab Sample only)	5.0 mg/L
32730	Phenols (grab)	0.005 mg/L
01147	Selenium	0.005 mg/L
01077	Silver (total)	0.003 mg/L
01092	Zinc	0.025 mg/L

Minimum Reporting Limits are defined as – (1) The minimum value below which data are documented as non-detects. (2) Three to ten times the method detection limit. (3) The minimum value of the calibration range.

All sample containers, preservative, holding times, analyses, method detection limit determinations and quality assurance/quality control requirements shall be in accordance with 40 CFR 136.

Unless otherwise indicated, concentrations refer to the total amount of the constituent present in all phases, whether solid, suspended or dissolved, elemental or combined, including all oxidation states.

*1.0 ng/L = 1 part per trillion.

**Utilize USEPA Method 1631E and the digestion procedure described in Section 11.1.1.2 of 1631E.

Special Conditions

***Analysis for cyanide (available or amenable to chlorination) is only required if cyanide (total) is detected at or above the minimum reporting limit.

****USEPA Method OIA-1677 or Standard Method SM 4500-CN G.

The Permittee shall provide a report briefly describing the permittee's pretreatment activities and an updated listing of the Permittee's significant industrial users. The list should specify which categorical pretreatment standards, if any, are applicable to each Industrial User. Permittees who operate multiple plants may provide a single report. Such report shall be submitted within six (6) months of the effective date of this Permit to the following addresses:

U.S. Environmental Protection Agency
Region 5
77 West Jackson Blvd.
Chicago, Illinois 60604
Attention: Water Assurance Branch Enforcement and Compliance

Illinois Environmental Protection Agency
Division of Water Pollution Control
Attention: Compliance assurance Section, Mail Code #19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276

SPECIAL CONDITION 11. The Permittee has undergone a Monitoring Reduction review and the influent and effluent sample frequency has been reduced for parameters due to sustained compliance. The IEPA may require that the influent and effluent sampling frequency for these parameters be increased without Public Notice. This provision does not limit EPA's authority to require additional monitoring, information or studies pursuant to Section 308 of the CWA.

SPECIAL CONDITION 12. The Permittee shall conduct biomonitoring of the effluent from Discharge Number(s) 001.

Biomonitoring

A. Acute Toxicity - Standard definitive acute toxicity tests shall be run on at least two trophic levels of aquatic species (fish, invertebrate) representative of the aquatic community of the receiving stream. Testing must be consistent with Methods for Measuring the Acute Toxicity of Effluents and Receiving Waters to Freshwater and Marine Organisms (Fifth Ed.) EPA/821-R-02-012. Unless substitute tests are pre-approved; the following tests are required:

1. Fish 96-hour static LC₅₀ Bioassay using fathead minnows (*Pimephales promelas*).
2. Invertebrate 48-hour static LC₅₀ Bioassay using *Ceriodaphnia*.

B. Testing Frequency - The above tests shall be conducted using 24-hour composite samples unless otherwise authorized by the IEPA. Sample collection and testing must be conducted in the 18th, 15th, 12th, and 9th month prior to the expiration date of this Permit. When possible, bioassay sample collection should coincide with sample

Special Conditions

collection for metals analysis or other parameters that may contribute to effluent toxicity.

- C. Reporting - Results shall be reported according to EPA/821-R-02-012, Section 12, Report Preparation, and shall be mailed to IEPA, Bureau of Water, Compliance Assurance Section or emailed to EPA.PrmtSpecCondtns@Illinois.gov within one week of receipt from the laboratory. Reports are due to the IEPA no later than the 16th, 13th, 10th, and 7th month prior to the expiration date of this Permit.
- D. Toxicity – Should a bioassay result in toxicity to >20% of organisms tested in the 100% effluent treatment, the IEPA may require, upon notification, six (6) additional rounds of monthly testing on the affected organism(s) to be initiated within 30 days of the toxic bioassay. Results shall be submitted to IEPA within one (1) week of becoming available to the Permittee. Should any of the additional bioassays result in toxicity to ≥50% of organisms tested in the 100% effluent treatments, the Permittee must contact the IEPA within one (1) day of the results becoming available to the Permittee and begin the toxicity identification and reduction evaluation process as outlined below.
- E. Toxicity Identification and Reduction Evaluation - Should any of the additional bioassays result in toxicity to ≥50% of organisms tested in the 100% effluent treatment, the Permittee must contact the IEPA within one (1) day of the results becoming available to the Permittee and begin the toxicity identification evaluation process in accordance with Methods for Aquatic Toxicity Identification Evaluations, EPA/600/6-91/003. The IEPA may also require, upon notification, that the Permittee prepare a plan for toxicity reduction evaluation to be developed in accordance with Toxicity Reduction Evaluation Guidance for Municipal Wastewater Treatment Plants, EPA/833B-99/002, which shall include an evaluation to determine which chemicals have a potential for being discharged in the plant wastewater, a monitoring program to determine their presence or absence and to identify other compounds which are not being removed by treatment, and other measures as appropriate. The Permittee shall submit to the IEPA its plan for toxicity reduction evaluation within ninety (90) days following notification by the IEPA. The Permittee shall implement the plan within ninety (90) days or other such date as contained in a notification letter received from the IEPA.

The IEPA may modify this Permit during its term to incorporate additional requirements or limitations based on the results of the biomonitoring. In addition, after review of the monitoring results, the IEPA may modify this Permit to include numerical limitations for specific toxic pollutants. Modifications under this condition shall follow public notice and opportunity for hearing.

SPECIAL CONDITION 13. Discharge Numbers 002, 003, and 004 are an emergency high level overflow discharges. Discharges from these outfall are prohibited. Permittee shall maintain continuous electronic monitors capable of detecting all discharges from each prohibited discharge outfall or shall inspect each listed prohibited discharge outfall listed above within 24 hours of receiving 0.25 inches of precipitation or greater within a 24 hour period as recorded at the nearest National Weather Service Reporting Station. Permittee shall utilize chalk or block devices or other discharge confirming devices approved by the Agency to enhance visual monitoring. These prohibited discharges, if they occur, are subject to conditions A-E listed below.

A. Definitions

Special Conditions

“Severe property damage” means substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a discharge. Severe property damage does not mean economic loss caused by delays in production.

B. Notice

1. Anticipated discharge. If the Permittee knows in advance of the need for a prohibited discharge from discharge numbers 002,003, and 004, it shall submit prior notice, if possible at least ten days before the date of the discharge.
2. Unanticipated discharge. The Permittee shall submit notice of an unanticipated discharge as required in Standard Condition 12(f) of this Permit (24-hour notice).

C. Limitation on IEPA enforcement discretion. The IEPA may take enforcement action against a Permittee for prohibited discharges from discharge numbers 002, 003, and 004, unless:

1. Discharge was unavoidable to prevent loss of life, personal injury, or severe property damage;
2. There was no feasible alternatives to the discharge, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a discharge which occurred during normal periods of equipment downtime or preventive maintenance; and
3. The Permittee submitted notices as required under Standard Condition 12(f) of this Permit.

D. Emergency discharges when discharging, shall be monitored daily by grab sample for BOD₅, Suspended Solids and Fecal Coliform. The Permittee shall submit the monitoring results on Discharge Monitoring Report forms using one such form for each month in which discharging occurs. The Permittee shall specify the number of discharges per month that occur and shall report this number in the quantity daily maximum column. The Permittee shall report the highest concentration value of BOD₅ and Suspended Solids and Fecal Coliform discharged in the concentration daily maximum column.

E. The above limitations on enforcement discretion apply only with respect to IEPA. They do not serve as a limitation on the ability of any other governmental agency or person to bring an enforcement action in accordance with the Federal Clean Water Act.

SPECIAL CONDITION 14. For the duration of this Permit, the Permittee shall determine the quantity of sludge produced by the treatment facility in dry tons or gallons with average percent total solids analysis. The Permittee shall maintain adequate records of the quantities of sludge produced and have said records available for U.S. EPA and IEPA inspection. The Permittee shall submit to the IEPA, at a minimum, a semi-annual summary report of the quantities of sludge generated and disposed of, in units of dry tons or gallons (average total percent solids) by different disposal methods including but not limited to application on farmland, application on reclamation land, landfilling, public distribution, dedicated land disposal, sod farms, storage lagoons or any other specified disposal method. Said reports shall be submitted to the IEPA by January 31 and July 31 of each year reporting the preceding January thru June and July thru December interval of sludge disposal

Special Conditions

operations.

Duty to Mitigate. The Permittee shall take all reasonable steps to minimize any sludge use or disposal in violation of this Permit.

Sludge monitoring must be conducted according to test procedures approved under 40 CFR 136 unless otherwise specified in 40 CFR 503, unless other test procedures have been specified in this Permit.

Planned Changes. The Permittee shall give notice to the IEPA on the semi-annual report of any changes in sludge use and disposal.

The Permittee shall retain records of all sludge monitoring, and reports required by the Sludge Permit as referenced in Standard Condition 25 for a period of at least five (5) years from the date of this Permit.

If the Permittee monitors any pollutant more frequently than required by this permit or the Sludge Permit, the results of this monitoring shall be included in the reporting of data submitted to the IEPA.

The Permittee shall comply with existing federal regulations governing sewage sludge use or disposal and shall comply with all existing applicable regulations in any jurisdiction in which the sewage sludge is actually used or disposed.

The Permittee shall comply with standards for sewage sludge use or disposal established under section 405(d) of the CWA within the time provided in the regulations that establish the standards for sewage sludge use or disposal even if the permit has not been modified to incorporate the requirement.

The Permittee shall ensure that the applicable requirements in 40 CFR Part 503 are met when the sewage sludge is applied to the land, placed on a surface disposal site, or fired in a sewage sludge incinerator.

Monitoring reports for sludge shall be reported on the form titled "Sludge Management Reports" to the following address:

Illinois Environmental Protection Agency
Bureau of Water
Compliance Assurance Section
Mail Code #19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276

SPECIAL CONDITION 15. A zone of initial dilution (ZID) is recognized for ammonia, cyanide (WAD), and copper with dimensions of 32 feet across the width of the river from the end-of-pipe and 75 feet downstream from this point. Within the ZID, 36.4:1 dilution is afforded. A mixing zone for ammonia is recognized with dimensions extending 101 feet across the width of the river and 1,320 feet downstream. Within the mixing zone 241:1 dilution is afforded.

SPECIAL CONDITION 16. The Permittee shall work towards the goals of achieving no

Special Conditions

discharges from sanitary sewer overflows or basement back-ups and ensuring that overflows or back-ups, when they do occur do not cause or contribute to violations of applicable standards or cause impairment in any adjacent receiving water. Overflows from sanitary sewers are expressly prohibited by this permit and by Ill. Adm. Code 306.304. As part of the process to ultimately achieve compliance through the elimination of and mitigating the adverse impacts of any such overflows if they do occur, the Permittee shall (A) identify and report to IEPA all SSOs that do occur, and (B) update the existing Capacity, Management, Operations, and Maintenance (CMOM) plan at least annually and maintain it at the facility for review during Agency Field Operations Section inspections. The Permittee shall submit copies of the CMOM to the IEPA upon written request. The Permittee shall modify the Plan to incorporate any comments that it receives from IEPA and shall implement the modified plan as soon as possible. The Permittee should work as appropriate, in consultation with affected authorities at the local, county, and/or state level to develop the plan components involving third party notification of overflow events. The Permittee may be required to construct additional sewage transport and/or treatment facilities in future permits or other enforceable documents should the implemented CMOM plan indicate that the Permittee's facilities are not capable of conveying and treating the flow for which they are designed.

The CMOM plan shall include the following elements:

A. Measures and Activities:

1. A complete map and system inventory for the collection system owned and operated by the Permittee;
2. Organizational structure; budgeting; training of personnel; legal authorities; schedules for maintenance, sewer system cleaning, and preventative rehabilitation; checklists, and mechanisms to ensure that preventative maintenance is performed on equipment owned and operated by the Permittee;
3. Documentation of unplanned maintenance;
4. An assessment of the capacity of the collection and treatment system owned and operated by the Permittee at critical junctions and immediately upstream of locations where overflows and backups occur or are likely to occur; use flow monitoring and/or sewer hydraulic modeling, as necessary;
5. Identification and prioritization of structural deficiencies in the system owned and operated by the Permittee. Include preventative maintenance programs to prevent and/or eliminate collection system blockages from roots or grease, and prevent corrosion or negative effects of hydrogen sulfide which may be generated within collection system;
6. Operational control, including documented system control procedures, scheduled inspections and testing, list of scheduled frequency of cleaning (and televising as necessary) of sewers;
7. The Permittee shall develop and implement an Asset Management strategy to ensure the long-term sustainability of the collection system. Asset Management shall be used to assist the Permittee in making decisions on when it is most appropriate to repair, replace or rehabilitate particular assets and develop long-term funding strategies; and
8. Asset Management shall include but is not limited to the following elements:
 - a. Asset Inventory and State of the Asset;
 - b. Level of Service;
 - c. Critical Asset Identification;
 - d. Life Cycle Cost; and

Special Conditions

e. Long-Term Funding Strategy.

B. Design and Performance Provisions:

1. Monitor the effectiveness of CMOM;
2. Upgrade the elements of the CMOM plan as necessary; and
3. Maintain a summary of CMOM activities.

C. Overflow Response Plan:

1. Know where overflows and back-ups within the facilities owned and operated by the Permittee occur;
2. Respond to each overflow or back-up to determine additional actions such as clean up; and
3. Locations where basement back-ups and/or sanitary sewer overflows occur shall be evaluated as soon as practicable for excessive inflow/infiltration, obstructions or other causes of overflows or back-ups as set forth in the System Evaluation Plan.
4. Identify the root cause of the overflow or basement backup, and document to files;
5. Identify actions or remediation efforts to reduce risk of reoccurrence of these overflows or basement backups in the future, and document to files.

D. System Evaluation Plan:

1. Summary of existing SSO and Excessive I/I areas in the system and sources of contribution;
2. Evaluate plans to reduce I/I and eliminate SSOs;
3. Evaluate the effectiveness and performance in efforts to reduce excessive I/I in the collection system;
4. Special provisions for Pump Stations and force mains and other unique system components; and
5. Construction plans and schedules for correction.

E. Reporting and Monitoring Requirements:

1. Program for SSO detection and reporting; and
2. Program for tracking and reporting basement back-ups, including general public complaints.

F. Third Party Notice Plan:

1. Describes how, under various overflow scenarios, the public, as well as other entities, would be notified of overflows within the Permittee's system that may endanger public health, safety or welfare;
2. Identifies overflows within the Permittee's system that would be reported, giving consideration to various types of events including events with potential widespread impacts;
3. Identifies who shall receive the notification;
4. Identifies the specific information that would be reported including actions that will be taken to respond to the overflow;
5. Includes a description of the lines of communication; and
6. Includes the identities and contact information of responsible POTW officials and local, county, and/or state level officials.

Special Conditions

For additional information concerning USEPA CMOM guidance and Asset Management please refer to the following web site addresses. http://www.epa.gov/npdes/pubs/cmom_guide_for_collection_systems.pdf and http://water.epa.gov/type/watersheds/wastewater/upload/guide_smallsystems_assetmanagement_bestpractices.pdf

SPECIAL CONDITION 17. The Permittee shall maintain a Phosphorus Discharge Optimization Plan. The plan shall include a schedule for the implementation of these optimization measures. Annual progress reports on the optimization of the existing treatment facilities shall be submitted to the Agency by March 31 of each year beginning 12 months from effective date of the permit. In developing the plan, the Permittee shall evaluate a range of measures for reducing phosphorus discharges from the treatment plant, including possible source reduction measures, operational improvements, and minor facility modifications that will optimize reductions in phosphorus discharges from the wastewater treatment facility. The Permittee's evaluation shall include, but not be limited to, an evaluation of the following optimization measures:

- A. WWTF influent reduction measures.
 1. Evaluate the phosphorus reduction potential of users.
 2. Determine which sources have the greatest opportunity for reducing phosphorus (i.e., industrial, commercial, institutional, municipal and others).
 - a. Determine whether known sources (i.e., restaurant and food preparation) can adopt phosphorus minimization and water conservation plans.
 - b. Evaluate implementation of local limits on influent sources of excessive phosphorus.
- B. WWTF effluent reduction measures.
 1. Reduce phosphorus discharges by optimizing existing treatment processes.
 - a. Adjust the solids retention time for either nitrification, denitrification, or biological phosphorus removal.
 - b. Adjust aeration rates to reduce dissolved oxygen and promote simultaneous nitrification-denitrification.
 - c. Add baffles to existing units to improve microorganism conditions by creating divided anaerobic, anoxic, and aerobic zones.
 - d. Change aeration settings in plug flow basins by turning off air or mixers at the inlet side of the basin system.
 - e. Minimize impact on recycle streams by improving aeration within holding tanks.
 - f. Reconfigure flow through existing basins to enhance biological nutrient removal.
 - g. Increase volatile fatty acids for biological phosphorus removal.

SPECIAL CONDITION 18.

An effluent limit of 0.5 mg/L Total Phosphorus 12 month rolling geometric mean (calculated monthly) (hereinafter "Limit"), will be applicable by the Permittee beginning December 31, 2035.

In order for the Permittee to achieve the above limit, it will be necessary to modify existing treatment facilities to include biological nutrient removal (both total phosphorus and total nitrogen) to meet the future 0.5 mg/L total phosphorus. The Permittee must implement the following compliance measures consistent with the schedule below:

- | | |
|-------------------------------------|--------------------|
| 1. Interim Report | March 31 each year |
| 2. Clarifier Improvements Complete | December 2029 |
| 3. Aeration System Upgrade Complete | December 2030 |

Special Conditions

- | | | |
|----|--|-------------------|
| 4. | Implement Biological Nutrient Removal System | December 2033 |
| 5. | System Optimization & Monitoring | December 2035 |
| 6. | Achieve compliance with the 0.5 mg/L Total Phosphorus
12 month rolling geometric mean (calculated monthly)
(hereinafter "Limit") | December 31. 2035 |

REPORTING

The Permittee shall submit progress reports electronically to EPA.PrmtSpecCondtns@illinois.gov with "IL0036421 Special Condition 18" as the subject of the email for the compliance schedule indicating: a) the date the item was completed, or b) that the item was not completed, the reasons for non-completion and the anticipated completion date to the Agency Compliance Section.

SPECIAL CONDITION 19. This Permit may be modified to include alternative or additional final effluent limitations pursuant to an approved Total Maximum Daily Load (TMDL) Study or upon completion of an alternate Water Quality Study.

SPECIAL CONDITION 20. PFAS Testing and Reporting

1. PFAS Sample Frequency and Type of Sample.

<u>Sampling Point</u>	<u>Sample Frequency</u>	<u>Sample Type</u>	<u>Report****</u>
Effluent	Quarterly*	Grab***	ng/L
Influent	Quarterly*	Grab***	ng/L
Biosolids	Semiannually**	Grab***	ng/L

*Quarterly sampling – Testing done during the first quarter (January – March) must be reported on the May Electronic Discharge Monitoring Report (NetDMR), testing done in the second quarter (April – June) must be reported on the August NetDMR, testing done in the third quarter (July – September) must be reported on the November NetDMR, and testing done in the fourth quarter (October – December) must be reported on the February NetDMR.

** Semiannually sampling – Testing done during the first half of each year (January through June) must be reported on the August NetDMR and sampling taken during the second half of each year (July through December) must be reported on the February NetDMR.

*** If the permittee prefers to collect composite samples instead grab samples, the permittee will be required to seek approval through the permit modification process. All samples shall be collected during dry weather flow, during normal business hours.

Special Conditions

**** The Minimum Level (ML) of quantification established for PFAS by the laboratory, when using the approved analytical method, shall be submitted with the test results each reporting period on the NetDMR.

2. Influent and effluent test results must be reported in nanograms per liter (ng/L) as a daily maximum concentration. Biosolids test results must be reported in nanograms per gram (ng/g) as a daily maximum.
3. USEPA Method 1633A - Analysis of Per- and Polyfluoroalkyl Substances (PFAS) in Aqueous, Solid, Biosolids, and Tissue Samples by LC-MS/MS (finalized December 2024) is to be used when testing for PFAS. When PFAS analytical methods are promulgated through rulemaking and incorporated into 40 CFR Part 136, the permittee shall follow the approved methods.
4. When testing for PFAS the laboratory shall determine their limit of quantitation (LOQ) for each analyte in accordance with the test method identified in Part 3 of this Special Condition. The LOQ is synonymous with Minimum Level (ML) and Reporting Limit. The laboratory LOQs (Minimum Levels) must not exceed the upper limit of the aqueous and biosolids ranges listed in the table in Part 7 of this Special Condition.
5. In addition to the testing and reporting requirements for the individual PFAS analytes listed on Part 7 of this Special Condition the permittee shall report the PFAS Sum. For purposes of this permit the PFAS Sum is the arithmetic summation of the individual analytes listed in Part 7 that are associated with a particular sampling event and location. Results must be submitted on the Net DMRs along with the individual test results.

Test results for individual analytes which are below the ML as described in Parts 1 and 4 of this Special Condition should be assigned a value of zero (0) when calculating the PFAS Sum.

6. If sample results for PFAS are consistently below the minimum level (ML) of quantification for two consecutive years using USEPA Method 1633A or methods approved under 40 CFR 136, once finalized, the permittee may request a reevaluation of the testing requirements. Documentation supporting the request for a reduction in monitoring for PFAS must be made by the permittee as a permit modification request.
7. Specific PFAS constituents that must be tested for, and reported on, are listed in the following table:

Target Analyte Name	Abbreviation	CASRN Number	STORET	Minimum Level (ML)

Special Conditions

				Aqueous (ng/L)	Biosolids (ng/g)
Perfluoroalkyl carboxylic acids					
Perfluorobutanoic acid	PFBA	375-22-4	51522	4 – 16	6.4 – 16
Perfluoropentanoic acid	PFPeA	2706-90-3	51623	2 – 8	3.2 – 8
Perfluorohexanoic acid	PFHxA	307-24-4	51624	1 – 4	1.6 – 4
Perfluoroheptanoic acid	PFHpA	375-85-9	51625	1 – 4	1.6 – 4
Perfluorooctanoic acid	PFOA	335-67-1	51521	1 – 4	1.6 – 4
Perfluorononanoic acid	PFNA	375-95-1	51626	1 – 4	1.6 – 13
Perfluorodecanoic acid	PFDA	335-76-2	51627	1 – 4	1.6 – 4
Perfluoroundecanoic acid	PFUnA	2058-94-8	51628	1 – 4	1.6 – 5
Perfluorododecanoic acid	PFDoA	307-55-1	51629	1 – 4	1.6 – 4
Perfluorotridecanoic acid	PFTTrDA	72629-94-8	51630	1 – 4	1.6 – 4
Perfluorotetradecanoic acid	PFTeDA	376-06-7	51631	1 – 4	1.6 – 4
Perfluoroalkyl sulfonic acids					
Acid Form					
Perfluorobutanesulfonic acid	PFBS	375-73-5	52602	1 – 4	1.6 – 4
Perfluoropentanesulfonic acid	PFPeS	2706-91-4	52610	1 – 4	1.6 – 4
Perfluorohexanesulfonic acid	PFHxS	355-46-4	52605	1 – 4	1.6 – 4
Perfluoroheptanesulfonic acid	PFHpS	375-92-8	52604	1 – 4	1.6 – 4
Perfluorooctanesulfonic acid	PFOS	1763-23-1	52606	1 – 4	1.6 – 4
Perfluorononanesulfonic acid	PFNS	68259-12-1	52611	1 – 4	1.6 – 4
Perfluorodecanesulfonic acid	PFDS	335-77-3	52603	1 – 4	1.6 – 4
Perfluorododecanesulfonic acid	PFDoS	79780-39-5	52632	1 – 4	1.6 – 4
Fluorotelomer sulfonic acids					
1H,1H,2H, 2H-Perfluorohexane sulfonic acid	4:2 FTS	757124-72- 4	52607	4 – 15	6.4 – 15

Special Conditions

1H,1H, 2H,2H-Perfluorooctane sulfonic acid	6:2 FTS	27619-97-2	52608	4 – 15	6.4 – 15
1H,1H, 2H,2H-Perfluorodecane sulfonic acid	8:2 FTS	39108-34-4	52609	4 – 15	6.4 – 15
Perfluorooctane sulfonamides					
Perfluorooctanesulfonamide	PFOSA	754-91-6	51525	1 – 4	1.6 – 4
N-methyl perfluorooctanesulfonamide	NMeFOSA	31506-32-8	52641	1 – 4	1.6 – 4
N-ethyl perfluorooctanesulfonamide	NEtFOSA	4151-50-2	52642	1 – 4	1.6 – 4
Perfluorooctane sulfonamidoacetic acids					
N-methylperfluorooctanesulfonamidoacetic acid	NMeFOSAA	2355-31-9	51644	1 – 4	1.6 – 4
N-ethyl perfluorooctanesulfonamidoacetic acid	NEtFOSAA	2991-50-6	51643	1-4	1.6 – 4
Perfluorooctane sulfonamide ethanols					
N-methyl perfluorooctanesulfonamidoethanol	NMeFOSE	24448-09-7	51642	10 – 40	16 – 40
N-ethyl perfluorooctanesulfonamidoethanol	NEtFOSE	1691-99-2	51641	10 – 40	16 – 40
Per- and Polyfluoroether carboxylic acids					
Hexafluoropropylene oxide dimer acid	HFPO-DA	13252-13-6	52612	2 – 8	6.4 – 16
4,8-Dioxa-3H-perfluorononanoic acid	ADONA	919005-14-4	52636	2 – 8	6.4 – 15
Perfluoro-3-methoxypropanoic acid	PFMPA	377-73-1	PF002	4 – 16	3.2 – 8
Perfluoro-4-methoxybutanoic acid	PFMBA	863090-89-5	PF006	4 – 15	3.2 – 8
Nonafluoro-3,6-dioxaheptanoic acid	NFDHA	151772-58-6	52626	2 – 7	3.2 – 8
Ether sulfonic acids					
9-Chlorohexadecafluoro-3-oxanonane-1- sulfonic acid	9Cl-PF3ONS	756426-58-1	PF003	4 – 15	6.4 – 15

Special Conditions

11-Chloroeicosafluoro-3-oxaundecane-1- sulfonic acid	11Cl-PF3OUdS	763051-92-9	PF004	4 – 15	6.4 – 15
Perfluoro(2-ethoxyethane) sulfonic acid	PFEESA	113507-82-7	52629	2 – 8	3.2 – 7
Fluorotelomer carboxylic acids					
3-Perfluoropropyl propanoic acid	3:3 FTCA	356-02-5	PF001	5 – 20	8 – 50
2H,2H,3H,3H-Perfluorooctanoic acid	5:3 FTCA	914637-49-3	PF007	25 – 100	40 – 100
3-Perfluoroheptyl propanoic acid	7:3 FTCA	812-70-4	PF005	25 – 100	40 – 100

SPECIAL CONDITION 21. PFAS Reduction Program:

1) PFAS Inventory:

a) The Permittee shall develop an inventory of those facilities which may have the potential to contribute or discharge PFAS into the sanitary sewer system. At a minimum, facilities which fall under one or more of the following SIC (NAICS) codes must be considered for inclusion in this inventory:

1020 (212230), 1041 (212221), 1094 (212291), 1311 (211120), 2221 (313210) , 2262 (313310), 2273 (314110), 2295 (313320), 2297 (313230), 2299 (313110), 2385 (314999), 2392 (314999), 2394 (314910), 2621 (322121), 2656 (322219), 2671 (322220), 2672 (322220), 2673 (322220), 2752 (323111), 2796 (323120), 2813 (325120), 2819 (211130, 325130, 325180), 2821 (325211), 2822 (325212), 2824 (325220), 2841 (325611), 2842 (325612), 2843 (325613), 2844 (325611), 2851 (325510), 2869 (325110, 325193, 325199), 2899 (325199, 325510, 325998), 2911 (324110), 2992 (324191), 3011 (326211), 3081 (326113), 3082 (326121), 3083 (326130), 3089 (326121), 3111 (316110), 3231 (323215, 327310), 3471 (332813), 3479 (332812), 3497 (332999), 3577 (334418), 3589 (333318), 3629 (335999), 3643 (335931), 3651 (334310), 3663 (334220), 3672 (334412), 3674 (334413), 3679 (334419), 3841 (333249), 3861 (333316), 4581 (488119), 4953 (562211, 562212, 562213, 562219), 5169 (424690), 5719 (442291), 7217 (561740), 7641 (811420), 9711 (928110).

b) Examples of other activities that may not have specific SIC codes, but have the potential to contribute or discharge PFAS into the sewer system, and therefore must also be included when developing the inventory list are:

i) Waste Management: RCRA Subtitle C Treatment, Storage, and Disposal Facilities (RCRA Part B permit holders; not defined by NAICS code).

Special Conditions

- ii) Firefighting training facilities.
 - iii) Airports (Part139).
 - iv) Any other activities that the permittee determines are known or expected sources of PFAS.
- c) The following information must be included for each facility that is included in the inventory:
- i) The facility name and address,
 - ii) List of SIC code(s,) or other reasons, which require the facility to be placed on the inventory list,
 - iii) Identification of wastewater discharges from the industrial facility which may have the potential to contribute or discharge PFAS into the sanitary sewer system,
 - iv) Actual or estimated monthly average flow rate in gallons per day (gpd) of wastewater being discharged to the sanitary sewer system by the facility for the previous year.
- d) The Permittee must submit an initial inventory report within 12 months of the permit effective date. Subsequent annual updated reports of the inventory list will be due 12 months from the previous report due date for the term of the permit.

Information on the initial and subsequent updated inventory reports must include:

- i) The name, address, and NPDES permit number of the Permittee,
- ii) The name and address of each facility on the inventory list,
- iii) List of SIC code(s), or other reasons, for each facility which resulted in the facility to be placed on the inventory list,
- iv) Identification of wastewater discharges at each facility which may have the potential to contribute or discharge PFAS into the sanitary sewer system,
- v) Actual or estimated monthly average flow rate in gallons per day (gpd) of wastewater being discharged to the sewer system during the previous year for each facility on the inventory list.

Special Conditions

Annual updated reports should identify only those sites currently discharging wastewater to the sanitary sewer.

2) PFAS Reduction Initiative:

- a) Within 24 months from the effective date of the permit the Permittee shall develop and implement a PFAS reduction initiative. The reduction initiative must include PFAS loading reduction plans for facilities identified in the inventory under paragraph 1) of this Special Condition.
- b) The PFAS loading reduction plans referred to above must include, for facilities identified in the inventory, the following Best Management Practices (BMPs):
 - i) Evaluation of the potential for the facility to use products containing PFAS or have knowledge or suspect wastewater being discharged to the sewer system to contain PFAS.
 - ii) Evaluation of Pollution prevention/source reduction opportunities which may include:
 - (1) Product elimination or substitution when a reasonable alternative to using PFAS is available in the industrial process,
 - (2) Accidental discharge minimization by optimizing operations and good housekeeping practices,
 - (3) Equipment decontamination or replacement (such as in metal finishing facilities) where PFAS products have historically been used to prevent discharge of legacy PFAS following the implementation of product substitution.
 - iii) Identification of the measures being taken to reduce PFAS loading from the facility, and any available information, including facility wastewater testing for PFAS, and/or the loading reduction achieved.
- c) PFAS loading reduction plans must be reevaluated and updated on an annual basis. The updated plans must identify any changes made since the previous plan was submitted.
- d) The Permittee is required to submit a PFAS reduction report annually to the Illinois Environmental Protection Agency at the addresses identified under paragraph 3) of this Special Condition with the first report due 36 months from the permit effective

Special Conditions

date. Subsequent annual reports shall be due 12 months following the previous report's due date.

PFAS reduction reports must include the following information:

- i) The name, address, and NPDES permit number of the Permittee,
 - ii) The name and address for each facility on the most current inventory list,
 - iii) The current PFAS loading reduction plans for each facility on the PFAS inventory list. Updated plans should include all changes made since the previous plan was submitted.
- 3) The Permittee shall submit the reports identified under paragraphs 1) and 2) of this Special Condition electronically or in writing to one of the following addresses:
- a) EPA.PrmtSpecCondtns@Illinois.gov
 - b) Illinois Environmental Protection Agency
Bureau of Water
Compliance Assurance Section
Mail Code #19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276