

NPDES Permit No. IL0032778

Notice No. KKD:26021801

Public Notice Beginning Date: March 13, 2026

Public Notice Ending Date: April 13, 2026

National Pollutant Discharge Elimination System (NPDES)
Permit Program

PUBLIC NOTICE/FACT SHEET
of
Draft Reissued NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois EPA
Division of Water Pollution Control
Permit Section
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276
217/782-0610

Name and Address of Discharger:

Illinois American Water Company
1000 Internationale Parkway
Woodridge, Illinois 60517

Name and Address of Facility:

IAW - Arbury Hills STP
9643 LaPorte Road
Mokena, Illinois 60448
(Will County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES Permit to discharge into the waters of the state and has prepared a draft Permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. All comments on the draft Permit and requests for hearing must be received by the IEPA by U.S. Mail, carrier mail or hand delivered by the Public Notice Ending Date. Interested persons are invited to submit written comments on the draft Permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the Permit applicant. The NPDES Permit and notice numbers must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft Permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft Permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final Permit is issued. For further information, please call Kaushal Desai at 217/782-0610.

The following water quality and effluent standards and limitations were applied to the discharge:

Title 35: Environmental Protection, Subtitle C: Water Pollution, Chapter I: Pollution Control Board and the Clean Water Act were applied in determining the applicable standards, limitations and conditions contained in the draft Permit.

The applicant is engaged in treating domestic wastewater for Illinois American Water Company.

The length of the Permit is approximately 5 years.

The main discharge number is 001. The seven day once in ten year low flow (7Q10) of the receiving stream, Hickory Creek is 1.1 cfs.

The design average flow (DAF) for the facility is 0.62 million gallons per day (MGD) and the design maximum flow (DMF) for the facility is 4.0 MGD. Treatment consists of screening, oxidation ditch, rapid sand filtration, final sedimentation (settling), disinfection (ultraviolet), and discharge to surface water. Sludge treatment consists of aerobic digestion and land application.

This Reissued Permit does not increase the facility's DAF, DMF, concentration limits, and/or load limits.


Pursuant to the waiver provisions authorized by 40 CFR § 123.24, this draft permit is within the class, type, and size for which the Regional Administrator, Region V, has waived his right to review, object, or comment on this draft permit action.

Application is made for the existing discharge(s) which is located in Will County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

<u>Discharge Number</u>	<u>Receiving Stream</u>	<u>Latitude</u>	<u>Longitude</u>	<u>Stream Classification</u>	<u>Integrity Rating</u>
001	Hickory Creek	41° 31' 15" North	87° 51' 15" West	General Use	D

To assist you further in identifying the location of the discharge(s) please see the attached map below.

The stream segment(s), Waterbody Segment GG-06, receiving the discharge from outfall(s) 001 is not on the 2024 303(d) list of impaired waters.

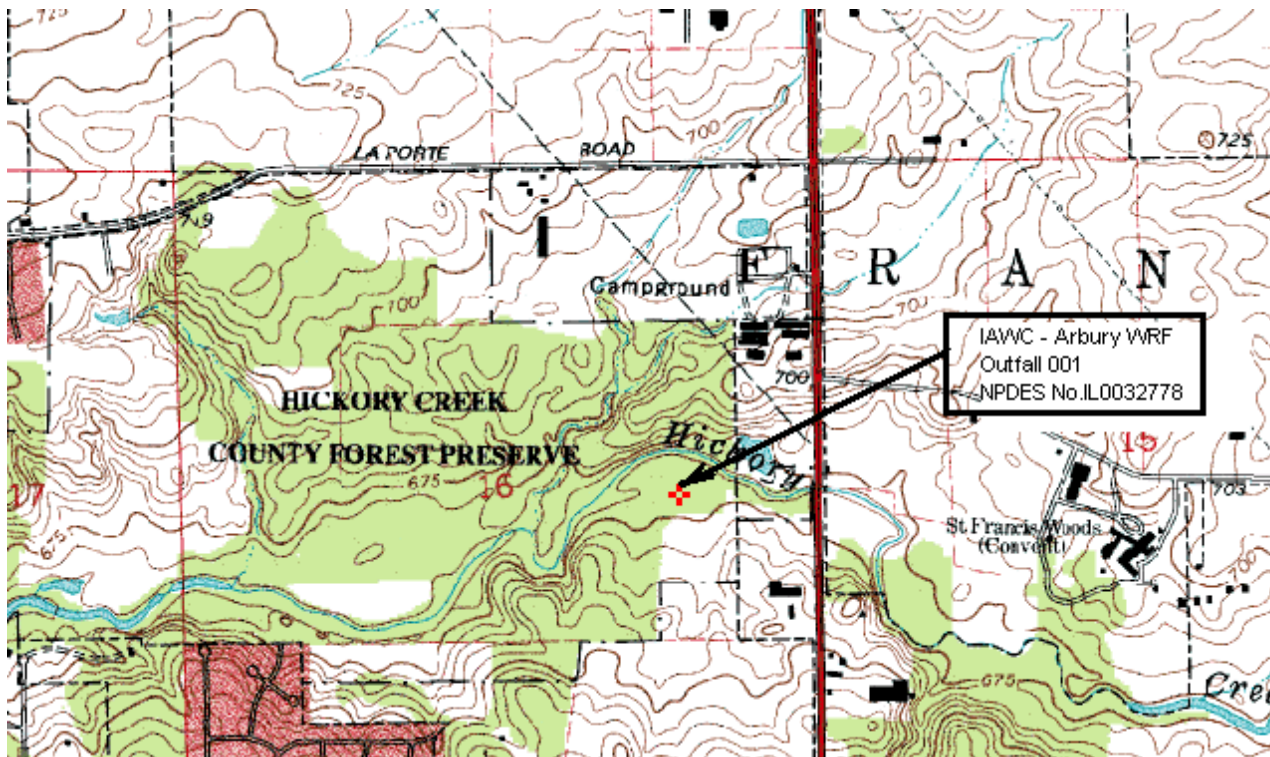

The discharge(s) from the facility is (are) proposed to be monitored and limited at all times as follows:

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.62 MGD (design maximum flow (DMF) of 4.0 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:

Parameter	LOAD LIMITS lbs/day DAF (DMF)*			CONCENTRATION LIMITS mg/L			Regulation	
	Monthly Average	Weekly Average	Daily Maximum	Monthly Average	Weekly Average	Daily Maximum		
CBOD ₅ **	52 (334)		103 (667)	10		20	35 IAC 304.120 40 CFR 133.102	
Suspended Solids**	62 (400)		124 (801)	12		24	35 IAC 304.120 40 CFR 133.102	
pH	Shall be in the range of 6 to 9 Standard Units						35 IAC 304.125	
Fecal Coliform	Daily Maximum shall not exceed 400 per 100 mL (May through October)						35 IAC 304.121	
Chlorine Residual							0.05	35 IAC 302.208
Ammonia Nitrogen: (as N)								35 IAC 355 and 35 IAC 302
March-May/Sept.-Oct.	7.8 (50)		19 (120)	1.5		3.6		
June-August	6.7 (43)	9.3 (60)	23 (150)	0.7	1.8	4.5		
Nov. – Feb.			17 (107)			3.2		
Total Phosphorus (as P)	Monitor Only						Monitor Only	35 IAC 309.146
Chloride							Monitor Only	35 IAC 309.146
Dissolved Oxygen								
March-July				N/A	6.25	5.0	35 IAC 302.206	
August-February				6.0	4.5	4.0		

*Load Limits are calculated by using the formula: $8.34 \times (\text{Design Average and/or Maximum Flow in MGD}) \times (\text{Applicable Concentration in mg/L})$

**BOD₅ and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent.

This draft Permit also contains the following requirements as special conditions:

1. Reopening of this Permit to include different final effluent limitations.
2. Operation of the facility by or under the supervision of a certified operator.
3. Submission of the operational data in a specified form and at a required frequency at any time during the effective term of this Permit.
4. More frequent monitoring requirement without Public Notice.
5. Prohibition against causing or contributing to violations of water quality standards.
6. Recording the monitoring results on Discharge Monitoring Report Forms using one such form for each outfall each month and submitting the forms to IEPA each month.
7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.
8. Effluent sampling point location.
9. Reopening of this Permit to include revised effluent limitations based on a Total Maximum Daily Load (TMDL) or other water quality study.
10. Seasonal Fecal Coliform limits.
11. Submission of semi annual reports indicating the quantities of sludge generated and disposed.
12. Reissued Phosphorus Discharge Optimization plan.
13. Hickory Creek Water Quality Study.

NPDES Permit No. IL0032778

Illinois Environmental Protection Agency

Division of Water Pollution Control

2520 West Iles Avenue

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Reissued (NPDES) Permit

Expiration Date:

Issue Date:

Effective Date:

Name and Address of Permittee:

Illinois American Water Company
1000 Internationale Parkway
Woodridge, Illinois 60517

Facility Name and Address:

IAW - Arbury Hills STP
9643 LaPorte Road
Mokena, Illinois 60448
(Will County)

Receiving Waters: Hickory Creek

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of the Ill. Adm. Code, Subtitle C, Chapter I, and the Clean Water Act (CWA), the above-named Permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the Effluent Limitations, Monitoring, and Reporting requirements; Special Conditions and Attachment H Standard Conditions attached herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the Permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Brant D. Fleming, P.E.
Manager, Municipal Unit, Permit Section
Division of Water Pollution Control

BDF:KKD:26021801

NPDES Permit No. IL0032778

Effluent Limitations, Monitoring, and Reporting

FINAL

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.62 MGD (design maximum flow (DMF) of 4.0 MGD).

From the effective date of this Permit until the expiration date, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

Parameter	LOAD LIMITS lbs/day			CONCENTRATION			Sample Frequency	Sample Type	
	DAF (DMF)*			LIMITS mg/L					
	Monthly Average	Weekly Average	Daily Maximum	Monthly Average	Weekly Average	Daily Maximum			
Flow (MGD)							Continuous		
CBOD ₅ ****	52 (334)		103 (667)	10		20	2 Days/Month	Composite	
Suspended Solids***	62 (400)		124 (801)	12		24	2 Days/Month	Composite	
pH	Shall be in the range of 6 to 9 Standard Units							2 Days/Month	Grab
Fecal Coliform	Daily Maximum shall not exceed 400 per 100 mL (May through October)							2 Days/Month	Grab
Chlorine Residual							0.05	2 Days/Month	Grab
Ammonia Nitrogen: (as N)									
March-May/Sept.-Oct.	7.8 (50)		19 (120)	1.5		3.6	2 Days/Month	Composite	
June-August	6.7 (43)	9.3 (60)	23 (150)	0.7	1.8	4.5	2 Days/Month	Composite	
Nov. – Feb.			17 (107)			3.2	2 Days/Month	Composite	
Total Phosphorus as (P)							Monitor Only	2 Days/Month	Composite
Chloride							Monitor Only	2 Days/Month	Composite
				Monthly Average not less than	Weekly Average not less than	Daily Minimum			
Dissolved Oxygen									
March-July				N/A	6.25	5.0	2 Days/Month	Grab	
August-February				6.0	4.5	4.0	2 Days/Month	Grab	

*Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

**Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

***BOD₅ and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent. The percent removal need not be reported to the IEPA on DMRs but influent and effluent data must be available, as required elsewhere in this Permit, for IEPA inspection and review. For measuring compliance with this requirement, 5 mg/L shall be added to the effluent CBOD₅ concentration to determine the effluent BOD₅ concentration. Percent removal is a percentage expression of the removal efficiency across a treatment plant for a given pollutant parameter, as determined from the 30-day average values of the raw wastewater influent concentrations to the facility and the 30-day average values of the effluent pollutant concentrations for a given time period.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

pH shall be reported on the DMR as minimum and maximum value.

Dissolved oxygen shall be reported on the DMR as a minimum value.

Fecal Coliform shall be reported on the DMR as a daily maximum value.

Chlorine Residual shall be reported on the DMR as daily maximum value.

Total Phosphorus shall be reported on the DMR as a daily maximum value.

Chloride shall be reported on the DMR as a daily maximum value.

NPDES Permit No. IL0032778

Influent Monitoring, and Reporting

The influent to the plant shall be monitored as follows:

<u>Parameter</u>	<u>Sample Frequency</u>	<u>Sample Type</u>
Flow (MGD)	Continuous	
BOD ₅	2 Days/Month	Composite
Suspended Solids	2 Days/Month	Composite

Influent samples shall be taken at a point representative of the influent.

Flow (MGD) shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

BOD₅ and Suspended Solids shall be reported on the DMR as a monthly average concentration.

Special Conditions

SPECIAL CONDITION 1. This Permit may be modified to include different final effluent limitations or requirements which are consistent with applicable laws and regulations. The IEPA will public notice the permit modification.

SPECIAL CONDITION 2. The use or operation of this facility shall be by or under the supervision of a Certified Class 2 operator.

SPECIAL CONDITION 3. The IEPA may request in writing submittal of operational information in a specified form and at a required frequency at any time during the effective period of this Permit.

SPECIAL CONDITION 4. The IEPA may request more frequent monitoring by permit modification pursuant to 40 CFR § 122.63 and Without Public Notice.

SPECIAL CONDITION 5. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 Ill. Adm. Code 302 and 303.

SPECIAL CONDITION 6. The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) electronic forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee is required to submit electronic DMRs (NetDMRs) instead of mailing paper DMRs to the IEPA unless a waiver has been granted by the Agency. More information, including registration information for the NetDMR program, can be obtained on the IEPA website, <https://epa.illinois.gov/topics/water-quality/surface-water/netdmr.html>.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 25th day of the following month, unless otherwise specified by the permitting authority.

Permittees that have been granted a waiver shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency
Division of Water Pollution Control
Attention: Compliance Assurance Section, Mail Code # 19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276

SPECIAL CONDITION 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.

SPECIAL CONDITION 8. Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

SPECIAL CONDITION 9. This Permit may be modified to include alternative or additional final effluent limitations pursuant to an approved Total Maximum Daily Load (TMDL) Study or upon completion of an alternate Water Quality Study.

SPECIAL CONDITION 10. Fecal Coliform limits for Discharge Number 001 are effective May thru October. Sampling of Fecal Coliform is only required during this time period.

The total residual chlorine limit is applicable at all times. If the Permittee is chlorinating for any purpose during the months of November through April, sampling is required on a daily grab basis. Sampling frequency for the months of May through October shall be as indicated on effluent limitations, monitoring and reporting page of this Permit.

SPECIAL CONDITION 11. For the duration of this Permit, the Permittee shall determine the quantity of sludge produced by the treatment facility in dry tons or gallons with average percent total solids analysis. The Permittee shall maintain adequate records of the quantities of sludge produced and have said records available for U.S. EPA and IEPA inspection. The Permittee shall submit to the IEPA, at a minimum, a semi-annual summary report of the quantities of sludge generated and disposed of, in units of dry tons or gallons (average total percent solids) by different disposal methods including but not limited to application on farmland, application on reclamation land, landfilling, public distribution, dedicated land disposal, sod farms, storage lagoons or any other specified disposal method. Said reports shall be submitted to the IEPA by January 31 and July 31 of each

Special Conditions

year reporting the preceding January thru June and July thru December interval of sludge disposal operations.

Duty to Mitigate. The Permittee shall take all reasonable steps to minimize any sludge use or disposal in violation of this Permit.

Sludge monitoring must be conducted according to test procedures approved under 40 CFR 136 unless otherwise specified in 40 CFR 503, unless other test procedures have been specified in this Permit.

Planned Changes. The Permittee shall give notice to the IEPA on the semi-annual report of any changes in sludge use and disposal.

The Permittee shall retain records of all sludge monitoring, and reports required by the Sludge Permit as referenced in Standard Condition 25 for a period of at least five (5) years from the date of this Permit.

If the Permittee monitors any pollutant more frequently than required by this permit or the Sludge Permit, the results of this monitoring shall be included in the reporting of data submitted to the IEPA.

The Permittee shall comply with existing federal regulations governing sewage sludge use or disposal and shall comply with all existing applicable regulations in any jurisdiction in which the sewage sludge is actually used or disposed.

The Permittee shall comply with standards for sewage sludge use or disposal established under section 405(d) of the CWA within the time provided in the regulations that establish the standards for sewage sludge use or disposal even if the permit has not been modified to incorporate the requirement.

The Permittee shall ensure that the applicable requirements in 40 CFR Part 503 are met when the sewage sludge is applied to the land, placed on a surface disposal site, or fired in a sewage sludge incinerator.

Monitoring reports for sludge shall be reported on the form titled "Sludge Management Reports" to the following address:

Illinois Environmental Protection Agency
Bureau of Water
Compliance Assurance Section
Mail Code #19
2520 West Iles Avenue
Post Office Box 19276
Springfield, Illinois 62794-9276

SPECIAL CONDITION 12. The Permittee shall maintain and implement a Phosphorus Discharge Optimization Plan. The plan shall include a schedule for the implementation of these optimization measures. Annual progress reports on the optimization of the existing treatment facilities shall be submitted electronically to EPA.PrmtSpecCondtns@illinois.gov with "IL0032778 Special Condition 12" as the subject of the email by March 31 of each year. As part of the plan, the Permittee shall evaluate a range of measures for reducing phosphorus discharges from the treatment plant, including possible source reduction measures, operational improvements, and minor facility modifications that will optimize reductions in phosphorus discharges from the wastewater treatment facility. The Permittee's evaluation shall include, but not be limited to, an evaluation of the following optimization measures:

- A. WWTF influent reduction measures.
 - 1. Evaluate the phosphorus reduction potential of users.
 - 2. Determine which sources have the greatest opportunity for reducing phosphorus (i.e., industrial, commercial, institutional, municipal and others).
 - a. Determine whether known sources (i.e., restaurant and food preparation) can adopt phosphorus minimization and water conservation plans.
 - b. Evaluate implementation of local limits on influent sources of excessive phosphorus.
- B. WWTF effluent reduction measures.
 - 1. Reduce phosphorus discharges by optimizing existing treatment processes.
 - a. Adjust the solids retention time for either nitrification, denitrification, or biological phosphorus removal.
 - b. Adjust aeration rates to reduce dissolved oxygen and promote simultaneous nitrification-denitrification.
 - c. Add baffles to existing units to improve microorganism conditions by creating divided anaerobic, anoxic, and aerobic zones.

Special Conditions

- d. Change aeration settings in plug flow basins by turning off air or mixers at the inlet side of the basin system.
- e. Minimize impact on recycle streams by improving aeration within holding tanks.
- f. Reconfigure flow through existing basins to enhance biological nutrient removal.
- g. Increase volatile fatty acids for biological phosphorus removal.

SPECIAL CONDITION 13. The Permittee will participate with other watershed stakeholders in a Hickory Creek Water Quality Study. The permit may be modified to include alternative or additional final effluent limitations pursuant to an approved Total Maximum Daily Load (TMDL) Study or upon completion of an alternate Hickory Creek Water Quality Study.

